




Anode Mark For R2/ R3 / R4


Absolute Maximum Ratings(Ta=25°C)

	UNIT	SPEC.
IF	mA	30
IFp	mA	100
VR	V	5
Topr	°C	-25~+80
Tstg	°C	-30~+85

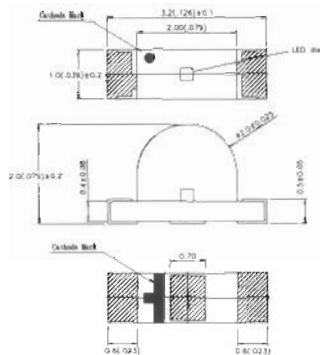


For reflow soldering

For upright mounting



For right anode mounting



NOTE:

- 1.All dimensions are in millimeters(inches).
- 2.Tolerance is $\pm 0.10(0.004)$ unless otherwise specified.
- 3.Specifications are subject to change without notice.