



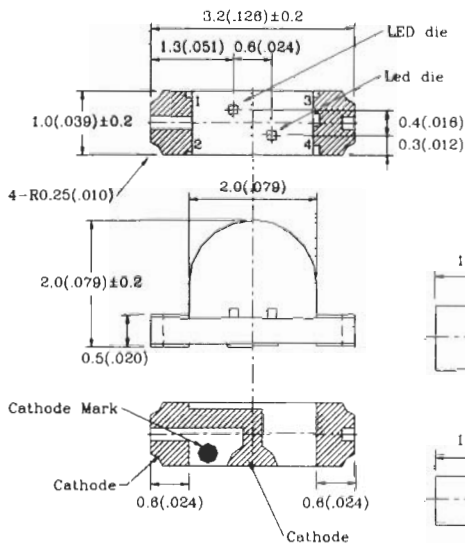


For reflow soldering

For upright mounting

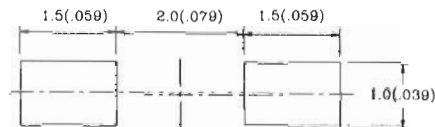

For right anode mounting

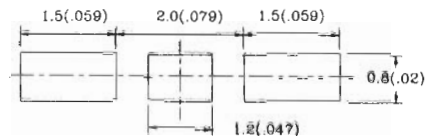

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	UNIT	SPEC.
I_F	mA	30
I_{Fp}	mA	100
V_a	V	5
T_{op}	$^\circ\text{C}$	-25~+80
T_{stg}	$^\circ\text{C}$	-30~+85

NOTE:

1. All dimensions are in millimeters (inches).

2. Tolerance is $\pm 0.10(.004)$ unless otherwise specified.

3. Specifications are subject to change without notice.