





Absolute Maximum Ratings(Ta=25°C)

	UNIT	SPEC.
IF	mA	30
IFp	mA	100
VR	V	5
Topr	°C	-25~+80
Tstg	°C	-30~+85

Anode Mark For R2 / R3 / R4

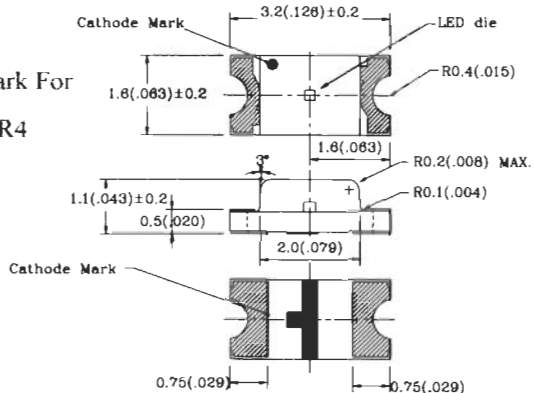

For reflow soldering

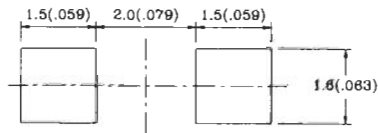

NOTE:

- 1.All dimensions are in millimeters(inches).
- 2.Tolerance is ±0.10(.004") unless otherwise specified.
- 3.Specifications are subject to change without notice.